Specification and Operation Instructions of X series

ABOUT SPECIFICATION:

	LENGTH	ENERGY USAGE	LEDS
Xmini	173mm	50W	24
X-60	605mm	150W	72
X-90	905mm	225W	108
X-120	1190mm	300W	144

ABOUT LEDS:

※ Each LED is driven at 600mA maximum.

※ Modular LED clusters for easy replacement and maintenance.

※ 12 LEDs of 7 colors in each LED cluster.

※ Full spectrum (390nm-700nm) light source.

ABOUT OPTICS:

※ Made of optical grade silicone.

※ High transimittance, no aging problem。

※ Special patterns for perfect color blending。

ABOUT CONTROLS:

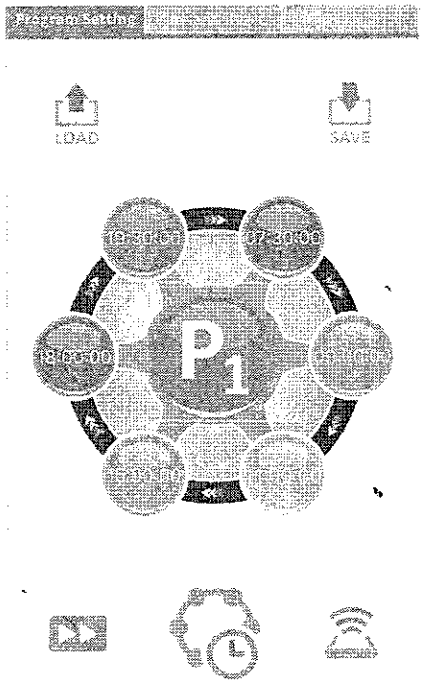

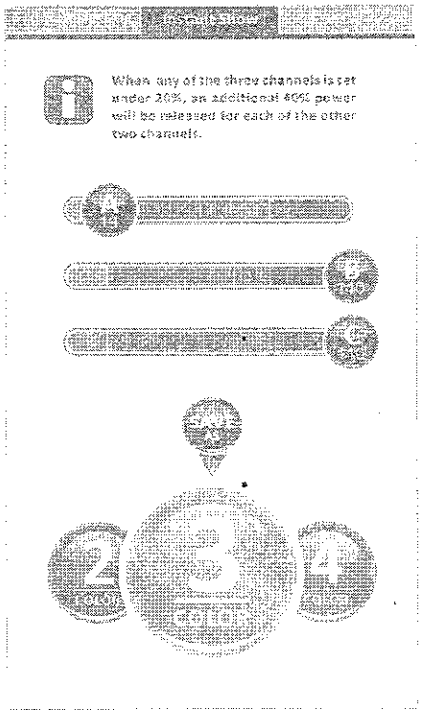

ABOUT APP:

1. Go to Apple store or Google Play to download "imOS CRX" and install it on your mobile device.

2. Turn on the Bluetooth on your mobile device.

3. Turn on the light fixture by pressing the icon on the side cover

4. Open "imOS CRX" app and press welcome page.

5. Press "Scan" to search the light nearby. If you can not find the light, try to turn off the light and turn on again to activate the Bluettoth module.

6. Choose the light on the list to link with your mobile device.

7. Enter "000000" as the password to link the light.

8. In instant show page, there are three bars of independent channels. You can use your finger to slide right or left to change the intensity of each channel.

9. When one of the three channels is reduced below 20%, the other channels will increase by 40% to allow thorough usage of the unused power.

10. When the intensities of the channels are determined, press "Save as" to save the settings to the color ball underneath. Slide the ball right or left can change the ball number, and there are totally six balls to be defined.

11. When the settings of the six balls are determined, you can use them in the program setting page that we will show you how to operate later.

12. Press the "Program setting" to do further settings.

13. In program setting page, you can see a time ring with six time balls. Each time ball can be programmed to have it's own time and color settings.

14. Press any of the time balls can enlarge the ball. Slide up or down can change hour, minute and sec. Slide right or left can change the color setting which you have defined in "Instant show" page.

15. In this control system, you can also let the light to switch it's color setting continuousl or discretely. Press the arrow icon between the balls. When it displays a single arrow the light will change discretely between two time points. When it shows three arrows , the light will change continuously.

16. After programming all the time balls, press this icon to check the time sequer of the balls. The system can automatically arrange the balls in time order.

17. When the six time balls of the program are all determined, press "Save" to kee the settings in your mobile device. Press "Update" to send out the settings to the li connected.

18. You can check how will the light colors change during a day by pressing the "Quick pla icon . Make sure to press "Stop" to escape from the quick play mode when you wa to do other settings.

19. There are totally three programs to be defined in this app. You can have different settings for different programs. If you want to run different program on the light, just choose the program you want, and press "update" to run a new program on the light.

※ **Do not overlap the adapters. This is harmful to the adapters and may cause malfunction.When the adapter is connected to light fixture, wait ten mins before us to achieve optimum performance.**

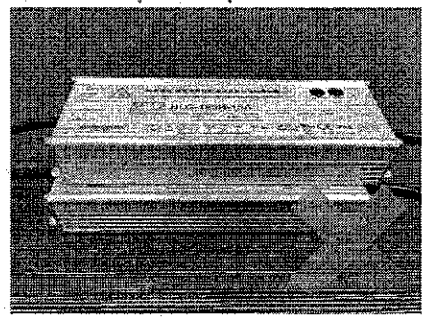

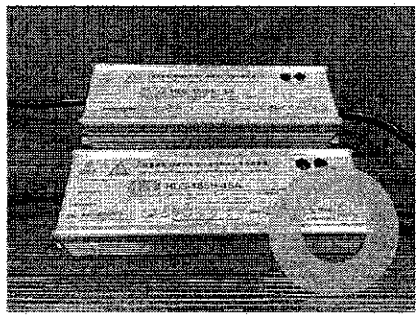

ABOUT WARRANTY:

※ The X series light fixture and power adapter(s) include a TWO YEAR limited warranty starting at the date of original purchase.

※ Any light fixture that exhibits tampering or modification will void the warranty.

※ The warranty for each fixture is recorded upon original sale. Each light fixture can be identified by serial number.